


Cat.6 UTP 8P8C Plug

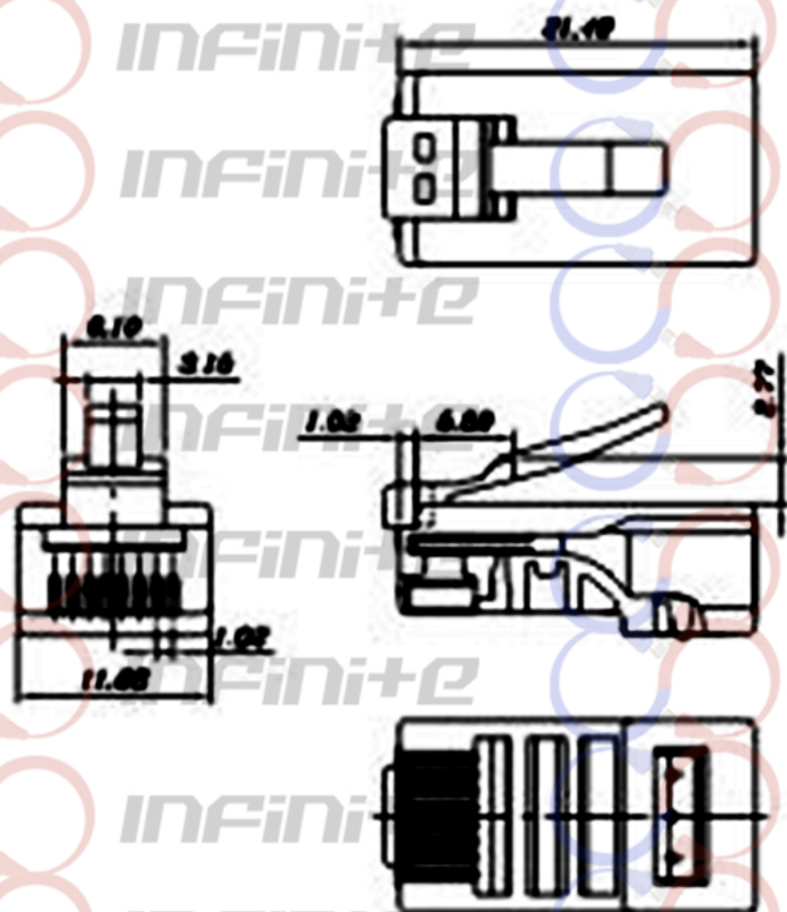

Cable Wire Accessories ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX, AT 2 AMPS.

DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.

INSULATION RESISTANCE: 100 MΩ

TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.

Cable Wire Accessories MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.

COLOR: TRANSPARENT OR OTHER COLORS ARE AVAILABLE.

CONTACT BLADE: PHOSPHOR BRONZE.

CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.