


Pin Assignment:

Pos. No.	T568B WIRING	Pos. No.
1	Orange	1
2	White	2
3	Green	3
6	White	6
4	White	4
5	Blue	5
7	Brown	7
8	White	8
SHIELDED		SHIELDED

Patch cord Cat. 6A INFINI+E

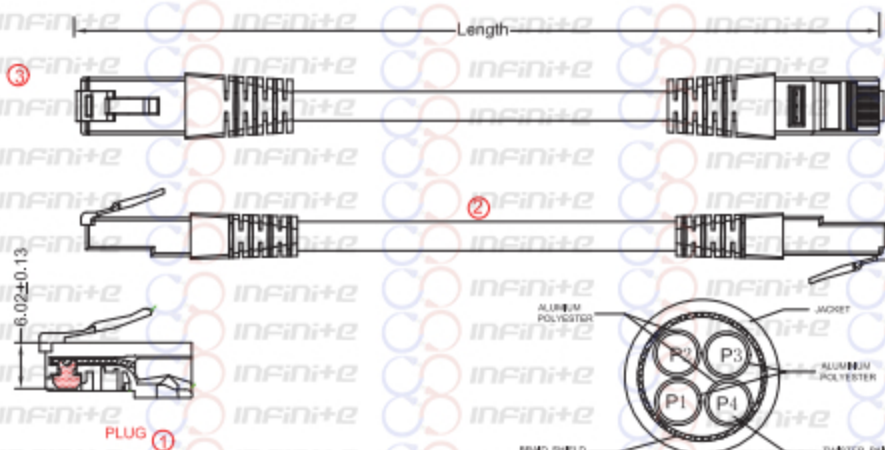

NOTES:

- ⚠ All cable 100% testing, any open, miswiring, short & intermittent are not permitted.
- ⚠ After crimping the distance between the bottom of contact and the top surface of plug are 5.90 ± 0.146mm.
- ⚠ The patch cable must be tested with CHANNEL test of Fluke TX-1800.
- ⚠ RoHS compliant.

- P1 BLUE & WHITE
- P2 ORANGE & WHITE
- P3 GREEN & WHITE
- P4 BROWN & WHITE

①	OVERMODE	75P-PVC	
②	CABLE	1PCS CAT 6A SFTP 24AWG/4P Stranded Cable Jacket PVC, 003, 2±0.2mm	
③	RJ45 PLUG	2PCS SHIELDED RJ45 6P9C Contact: Phosphor Bronze 3U 1.1mm	
NO.	ITEM	QTY	DESCRIPTION

METRIC	ANGLES	RFQ NO.	DWG NO.	TITLE:	REV.	A	UNIT:	mm
X, X ± 0.20	X, X° ± 0.5°			CAT 6A SFTP PATCH CORD				
XX, X ± 0.50	XX, X° ± 1°	DATE:	SHEET 1 OF 1				SCALE:	Free
XXX, X ± 1.0°	XXX, X° ± 1°	CUSTOMER:	PartNo:				P/N:	
SYMBOL	QTY	DESCRIPTION						
■	2	CRITICAL DIMENSION						
□	2	MAJOR DIMENSION						
					Drawn:	Myron		
					Approval:	Myron		