


NOTE:

1. PANEL FRAME : ST12, T=1.6mm, POWDER COATING
2. BODY COLOR : BLACK
3. BURR : 0.05MM MAX

Patch Panel Cat. 6 24 Ports INFINI+E

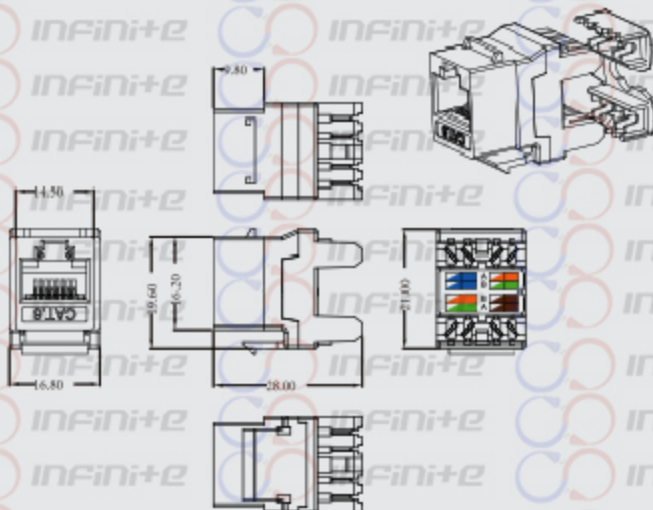

NOTES

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 20 MILLIOHMS MAX
4. INSULATION RESISTANCE : 100 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz, 1MIN
6. C6 PERMANENT LINK : CONFORM TO ANSII/TIA/EIA-568 B.2-1

ENVIRONMENTAL:

1. STORAGE : -40° TO +70°
2. OPERATION : -10° TO +60°

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

MECHANICAL:

1. HOUSING MATERIAL : PC
2. INSERT MATERIAL : PC
3. PCB MATERIAL : FR-4 T=1.2mm
4. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN T=0.35mm
5. IDC CONTACT MATERIAL : PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
6. RJ45 JACK LIFE : 750 TIMES MIN
7. IDC LIFE : 200 TIMES MIN
8. WIRE : AWG 22-24
9. TIA Cat 6 Perm. Link Test: Worst pair NEXT margin \geq 3.0dB
10. Relentiveness of insertion structure: 50N 60 \pm 5s